



MUSIC CABINET IP LOUDSPEAKERS

JD20W-IP

The JD20W-IP is a 20 W IP speaker for voice, paging, intercom, music streaming, audio routing, pre-recorded and scheduled announcement, VoIP communication or as the SIP endpoint where network-wide communication is desired and high-output loudspeakers are required to overcome high ambient noise and/or large spaces.

The JD20W-IP incorporates 3 control inputs for level control and source selection (using the RAC 5/8 controllers), 1 contact output for triggering events. To configure, control, monitor the IP speakers in real-time, this can be easily done through your favorite web browser interface, making the management even the most complex environments simpler than ever.



● Certifications	EN 55032, EN 55035, EN 61000-3-2, EN 61000-3-3
● Electrical	
Rated power, Watts	20
Effective Frequency Range, Hz (BS EN 60268-5)	63 – 20,000
S.P.L. @ 1 m, 1 Watt, dB, Octave, 100 Hz-10 kHz	84
S.P.L. @ 1 m, Full power, dB, Octave, 100 Hz-10 kHz	97
Dispersion at 1k/2k Hz, Degrees	180/100
Power supply	PoE+ 24 VDC power transformer (18-24 VDC), minimum power supply: 2 A
● Environmental	
IP Rating	n/a
Min/Max Ambient Temp	-10°C to 55°C
Relative Humidity	≤75%
● Mechanical	
Dimensions, front & depth, mm	146 x 229 x 150
Net weight, kg	2.43
Colour/Finish	White
Material	ABS moulded housing
Mounting	Die-cast Aluminium Swivel Bracket
● Features	
Configured, controlled, managed and monitored via web browser	
3 control inputs for level control and source selection using the RAC 5/8 controller	
1 relay contact output	
Network audio codec: G.711, G.722, WAV, mp3	
3rd party control with TERRACOM system	
Support VoIP call via SIP protocol	



ATEIS Europe B.V.

Celsiusstraat 1, 2652 XN Lansingerland, Netherlands


Phone +31 (0)10 208 86 90, www.ateis-europe.com, info@ateis-europe.com





INSTALLATION GUIDE

JD20W-IP


Side view
(unit: mm)




Top view
(unit: mm)

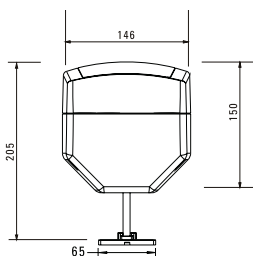

STEP 1




STEP 2




STEP 3

Volume selector switch can be found in the centre of the Penton Logo




STEP 4

ATTENTION
DO NOT OVERTIGHTEN




STEP 5



SPEAKER CONNECTIONS

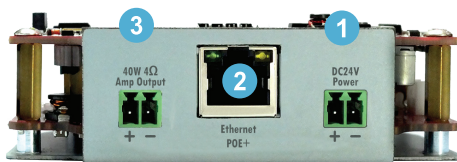

1. 24 VDC power input
2. RJ45 connector Ethernet
3. Speaker connection - 1 channel 20 W

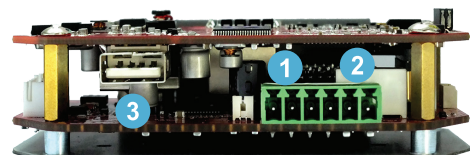


1. 3 logic control inputs
2. 1 contact output
3. USB interface (function reserved - Not available)

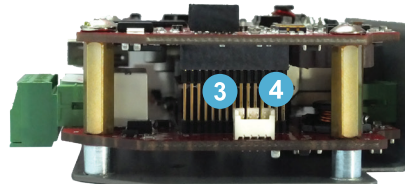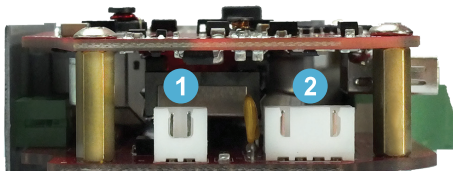

1. LED strobe connector (+ -)
2. Clock module interface
3. Power LED (+ -)
4. Status LED (+ -)

Only the RJ45 connector is available without opening the enclosure of the speaker. For other connectors, it is necessary to open the enclosure.

FUNCTION BLOCK



Disclaimer: We reserve the right of changes and errors.



ATEIS Europe B.V.
Celsiusstraat 1, 2652 XN Lansingerland, Netherlands
Phone +31 (0)10 208 86 90, www.ateis-europe.com, info@ateis-europe.com

