

BUDGET CEILING SPEAKER

RLS5/FTS

The RLS5/FTS is a budget ceiling speaker as one-piece version and a metal housing. The speaker will be delivered including a fire dome. Thanks to its spring clip, the mounting of this product is very fast. The RLS5/FTS is suitable for use in applications where background music is the primary requirement such as shops, restaurants, hotels, public houses, offices etc.



● Electrical	
Rated power, Watts	6
Tappings 100 volt line, Watts	6/3/1.5
Transformer Impedance, Ohms 100V	1.67k /3.33k/6.67k
Tappings 70,7 volt line, Watts	3/1.5/0.75
Driver Impedance, Ohms	4
Effective Frequency Range, Hz (BS EN 60268-5)	100-12,000
S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10kHz	90
S.P.L. @ 1m, Full power, Test Signal Bandwidth 100Hz-10kHz	98
● Environmental	
IP Rating	21
Min/Max amb temp	-10°C to 55°C
Relative Humidity	≤95%
● Mechanical	
Dimension, mm	Ø174x110
Net weight, kg	0.86
Colour (Unless Specified)	White RAL9016
Material	Steel
Mounting	Fast spring clip
Cut-out, mm	Ø155
Safety	Supplied with fire dome






PENTON


INSTALLATION GUIDE

RLS5/FTS


Front view
(unit: mm)

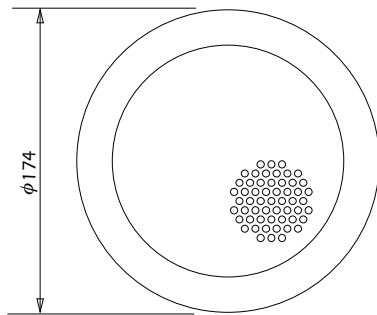



Side view
(unit: mm)

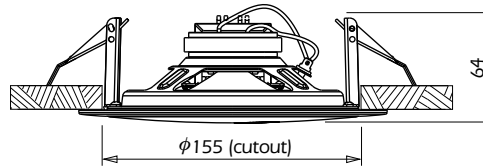

Side view
(unit: mm)

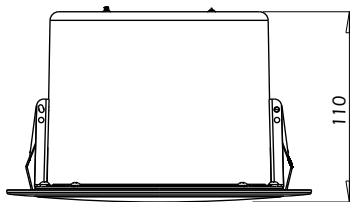


Rear view
(unit: mm)

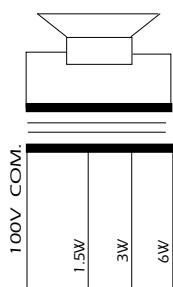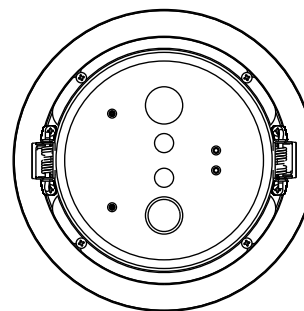

Circuit Diagram

Frequency response

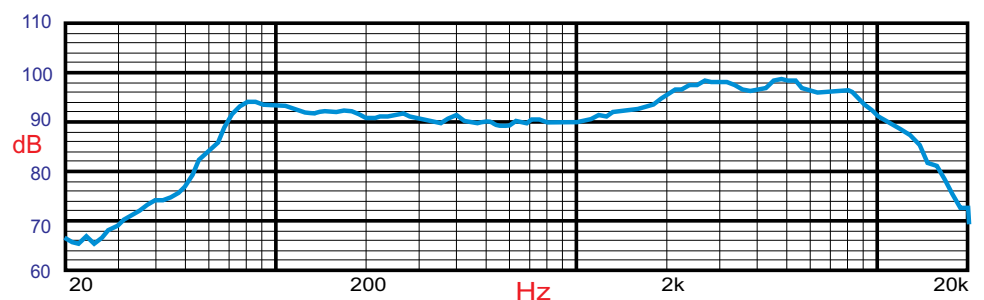

Disclaimer: We reserve the right of changes and errors.



ATEIS Europe B.V.
Celsiusstraat 1, 2652 XN Lansingerland, Netherlands
Phone +31 (0)10 208 86 90, www.ateis-europe.com, info@ateis-europe.com

