SIP-BASED AUDIO OVER IP

TERRA-FX0 FULL DUPLEX IP TERMINAL TO TELECOM GATEWAY



CHARACTERISTICS

� TERRACOM™

- SNMP (Simple Network Management Protocol) for device management on IP Networks
- PoE or 24 VDC power supply (if PoE is not available)
- 2 sets of telephone lines interface
- Full duplex with Acoustic Echo Cancellation and Noise Reduction
- Web browser interface for device management and monitor
- Internal 80 mb storage for recoding, message storage
- RS232 or RS485 for 3rd party control
- Power LED and Status LED indicators
- Power consumption: 2.66W
- Weight: 0.95 lbs (430g)
- Dimensions (D x H x W): 4" x 1-1/4" x 4-3/10" (104 x 32 x 109 mm)

Function	Supported Audio Codec
SIP	G.711 ulaw, G.711 alaw, G.722, G.726-32, G.727-32, G.729, PCM16K
Record	G.711 ulaw, G.711 alaw, G.722, WAV, MP3

ORDERING INFORMATION

TERRA-FXO	Full Duplex IP Terminal to Telecom Gateway (analog phone interface x 2, RS232 x 1)
TERRA-FXO4	Full Duplex IP Terminal to Telecom Gateway (analog phone interface x 2, RS485 x 1)

TERRACOM SYSTEM

The TERRACOM audio communication, messaging and intercommunication platform is a suite of products designed to transmit live audio paging, stored messaging, background music, 2-way intercommunications, control input/output triggers, and audio monitoring over TCP/IP. The TERRACOM range supports POE (Power over Ethernet), and/or can be powered locally with external 24VDC power supply. The network infrastructure of TERRACOM uses any existing network, and via a router will allow connection to the Internet for transmission and control.


A built-in web browser interface allows simplified control and programming of the TERRACOM devices. In addition, by using the TerraManager GUI-based control software, call-paging, full duplex intercom, paging groups, zones selection, audio routing, recording, event scheduler, device I/O monitoring and other control functions and device management can be easily programmed and operated.

The TERRA-FXO supports paging with unicast, multicast, broadcast, as well as AEC (Acoustic Echo Cancellation) and NR (Noise Reduction).

The TERRA-FXO offers full duplex communication for IP intercom and telephone, it comes with 2 sets of telephone interfaces for receiving calls or broadcasting.

APPLICATIONS

The TERRACOM range of devices can be utilised within a variety of applications for real time broadcasting, intercommunication, music playback etc. whilst additionally allowing integration with logic control for light, curtain, TV or air conditioning on/off via RS232, RS485 or Ethernet.

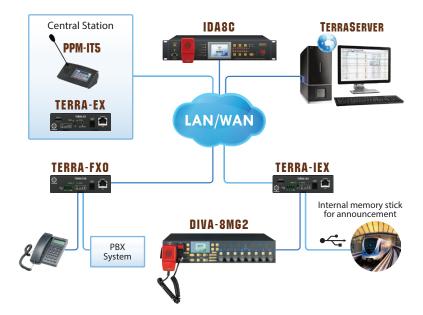



ATEÏS Europe B.V.

Celsiusstraat 1 - 2652 XN Lansingerland (Rotterdam Region), Netherlands Tel: +31 (0)10 2088690 | www.ateis-europe.com | info@ateis-europe.com